

# AD AI 10



Navigate with Precision  
Efficiency Meets Affordability

# AP10



AP10 GNSS is a powerful and cost-effective GNSS receiver.

- It is with a built-in 2W UHF modem, working range is 8-15km.
- It is perfect for base station or rover applications.
- Up to 120° tilt IMU with the built tilt sensor increase surveying efficiency by up to 30%.

It is a highly productive rtk for surveying and stakeout in any topographic, mapping or construction site applications.

## PRODUCT FEATURES



With advanced 1408-channel GNSS technology, supports GPS, GLONASS, Galileo, BeiDou, QZSS and SBAS constellations tracking to achieve reliable centimeter-level positioning accuracy in challenging environments.




**1408 channels  
GNSS**

IP67 and IK08 for dust, water, shock, and vibration resistance. alloy body ensures durability and reliable performance in tough field conditions. Making your surveying in harsh environments with confidence.



**Rugged and  
Durable Design**

**Up to  
120°IMU**

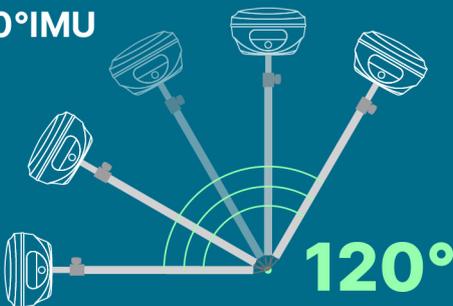

With calibration-free IMU sensor, AP10 is free from magnetic interference and accurate direction, no need for calibration, no need for initialization and improves by 30% in its measurement accuracy. AP10 uses the 4.0 IMU can get fixed up to 120° to meet more complex environments.

**2W UHF  
Rx/Tx radio**

**15KM**



The built-in integrated radio transceiver can cover a range of 8-15km, It performs as well as the external large radio station. AP10 operates as both a base and rover and when connect to a GNSS RTK network, It is an efficient NTRIP rover.

# DATA CONTROLLER

## CS3i



### SUPPORT

Google System, Google Maps



### SIM CARD

SIM card can be inserted

### Android 11 OS

Powered by Android 11 OS

### 5.5 inch

5.5 inch large screen  
sunlight readable

### IP68

IP68 waterproof and  
dustproof

### 4G/WiFi

Communication

### 9000mAh

9000mAh battery for all  
day operating

### 4GB +64GB

4GB RAM+64GB ROM  
+Extend TF




## ApekSurv Field Software

- Compatible Android controller, phone and tablet.
- Support all kinds of language from the world.
- Support multiple base map, Googlemap, WMS map.
- Support all survey modes, including Static, PPK and RTK.
- Support CAD import and directly use for stake out.
- Support TXT, CSV, AutoCAD DXF DWG SHP data formats.
- Support GNSS, GIS and Total Station



## Web UI Management

By connection through WiFi, APEKS gnss can be managed on your PC browser or smartphone easily. You can monitor check the status, configure, register, upgrade firmware, download data, etc.

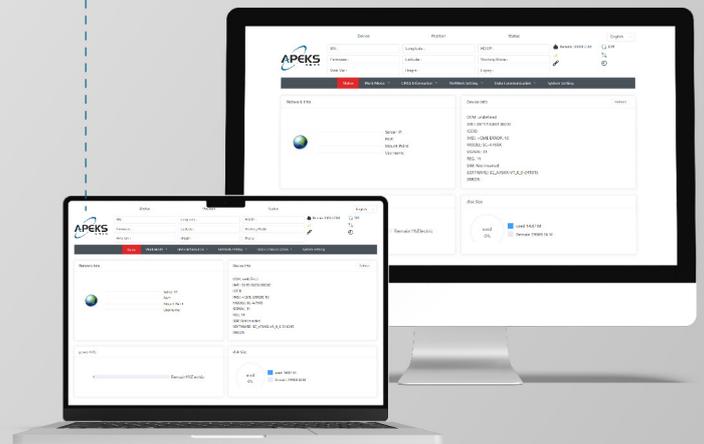

## SATELLITES TRACKING

Channels	1408
GPS	L1C/A, L2C, L2P(Y),L5
GLONASS	L1,L2,L3*
Galileo	E1, E5a, E5b, E6*
BDS	B11, B21, B3I, B1C, B2a, B2b*
QZSS	L1C/A, L1C, L2C, L5
NavIC/IRNSS	L5
SABAS	L1,L5*
PPP	B2B-PPP/E6-HAS

## ACCURACY

Real time kinematics (RTK)	H: 8mm + 1 ppm RMS V: 15mm+ 1 ppm RMS Initialization time:<5s(typical) Initialization reliability:>99.9%
Post-processing kinematics (PPK)	H: 2.5mm + 0.5ppm RMS V: 5mm + 0.5ppm RMS
PPP	H: 10cm RMS V: 20cm RMS
DGPS	H: 0.4m RMS V: 0.8m RMS
Single Point	H: 1.5m RMS V: 2.5m RMS
Position Frequency	1HZ 2HZ 5HZ 10HZ 20HZ 50HZ
Time to first fix	Cold start<45s Hot start<10s Signal re-acquisition<1s
IMU tilt angle	0-120°
IMU tilt survey accuracy	≤2cm within 60° tilt angle

## ENVIRONMENTS

Working temperature	-45°C to +75°C
Storage temperature	-55°C to +85°C
Humidity	100% Non-condensing
Waterproof & Dustproof	IP67
Drop	Survive a 2-meter pole-drop
Vibration	IK08

## COMMUNICATION

UHF radio	2W Tx/Rx, 410-470 MHz Working range is 8-15km in ideal environments
Protocol	TT450,TRIMMARK3,SOUTH,SATEL Link rate :9600bps to 19200bps
Wifi	802.11b/g/n/ac Hotspot/Data Link
Bluetooth	Bluetooth 5.2 classical/ BLE proprietary dual-mode
NFC	NFC touch pairing
WebUI	Accessible via Wi-Fi
4G Cellular	• Integrated full frequency multi band 4G modem • Supports LTE-TDD/LTEFDD/WCDMA/CDMA2000/UMTS/HSPA+/GSM/GPRS/EDGE
I/O port	• 1xUSB Type-C port (Data download / Charging) • 1xAntenna port(UHF antenna interface) • 1xSim card slot (Supports Nano-sim)
Data formats	RTCM 2.X, RTCM 3.X, RINEX, NMEA 0183 output, NTRIP
Data storage	32GB high speed memory

## HARDWARE

Size	129mm(W) 77mm (H) 5inch(W) 3inch(H)
Weight	<800g(1.76lb)
Front panel	1x Data Link, 1x Satellite, 1x Bluetooth, 1xPower

## ELECTRICAL

Battery	Internal Li-ion Battery 7.4V 7000mAh
Charging specs	USB Type-C fast charging
Operation time	Rover mode:18 hours Base mode:7 hours Static mode:20 hours



Shanghai Apekstool Optoelectronic Technology Co., Ltd

Xinao Creative Park, No.350 Yindu West Road Songjiang District, Shanghai China



Website  
[www.apeksgnss.com](http://www.apeksgnss.com)

Mail  
[Sales@apekstool.com](mailto:Sales@apekstool.com)